


CRANE LADLES

Designed for Foundrymen

**SIZES UP TO
30,000 LB**

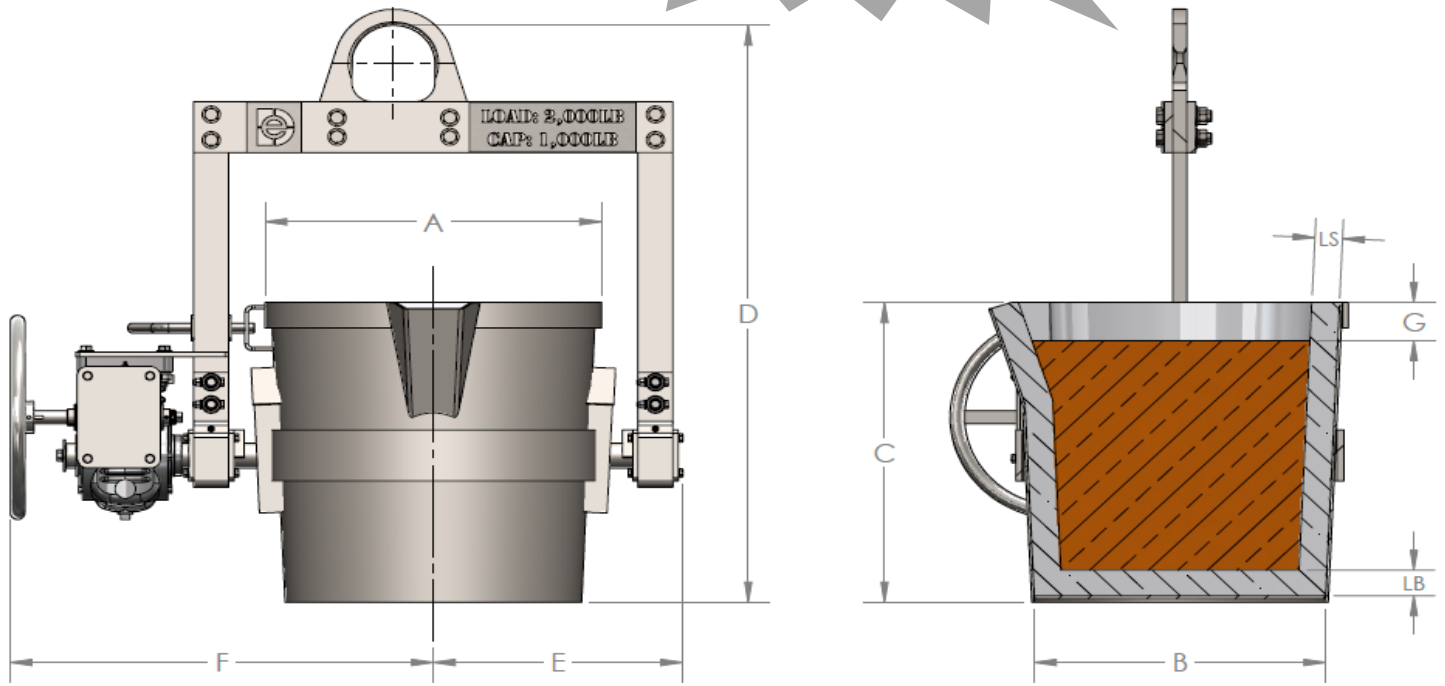

Ladle lining forms, cradles that hold ladles for pouring, and motorized gear tilting options are available for all D&E Ladles products. See catalog page 15 for a complete description of D&E Ladles innovations and accessories.

T3 Series									
Capacity (Iron)	A Top ID	B Bottom ID	C Height	D	LH*	E	F	G	LB & LS
400	18.0	16.5	18.0	34.75	8.0	15.25	27.5	3.0	2.0
700	20.5	18.5	20.5	40.5	8.0	16.5	28.75	3.0	2.0
830	21.5	19.5	21.5	42.5	8.0	17.0	29.25	3.0	2.0
1,050	23.0	21.0	23.0	44.0	8.0	17.75	30.0	3.0	2.0
1,150	25.5	23.5	25.5	50.0	8.75	20.25	34.25	4.0	3.0
1,450	27.0	25.0	27.0	51.75	8.75	21.0	35.0	4.0	3.0
1,800	28.5	26.0	28.5	54.75	8.75	21.75	35.5	4.0	3.0
2,200	30.0	27.5	30.0	55.5	8.75	23.0	36.25	4.0	3.0
2,650	31.5	28.5	31.5	59.25	8.75	23.75	37.0	4.0	3.0
3,350	34.5	31.0	34.5	66.75	8.75	25.0	38.5	4.5	3.5
4,125	36.5	33.0	36.5	69.25	8.75	26.0	39.5	4.5	3.5
6,100	40.5	36.5	40.5	75.5	15.75	30.0	47.0	4.5	3.5
8,000	43.5	39.0	43.5	80.75	15.75	31.5	48.5	4.5	3.5
8,700	45.5	41.0	45.5	85.5	15.75	32.5	49.5	4.5	4.0
10,200	48.0	43.0	48.0	91.25	15.75	34.0	52.25	5.0	4.0
11,900	51.0	46.5	51.0	96.0	15.75	35.5	53.75	6.0	4.5
13,900	54.0	49.0	54.0	99.5	15.75	37.0	55.25	6.0	5.0
15,900	56.0	51.0	56.0	106.25	15.75	38.0	56.25	6.0	5.0
19,000	58.5	53.5	58.5	111.0	15.75	39.25	57.75	6.0	5.0

*Height "D" is reduced by "LH" with Low Headroom Bail option.

Note: Capacities are in pounds. Dimensions are in inches. All specs are subject to change.